Exchange 2013: POP3

Logging

Das Logging wird mittels des folgenden Befehls aktiviert (Exchange Management Shell):

```
Set-PopSettings -Server "Exchange-Server" -protocolLogEnabled $false
```


Überprüfung erfolgt über den Befehl:

```
Get-PopSettings | format-list
```

Der Standard-Pfad ist folgender:

```
C:\Program Files\Microsoft\Exchange Server\V15\Logging\Pop3Logging
```

Event 1011: status has changed to false

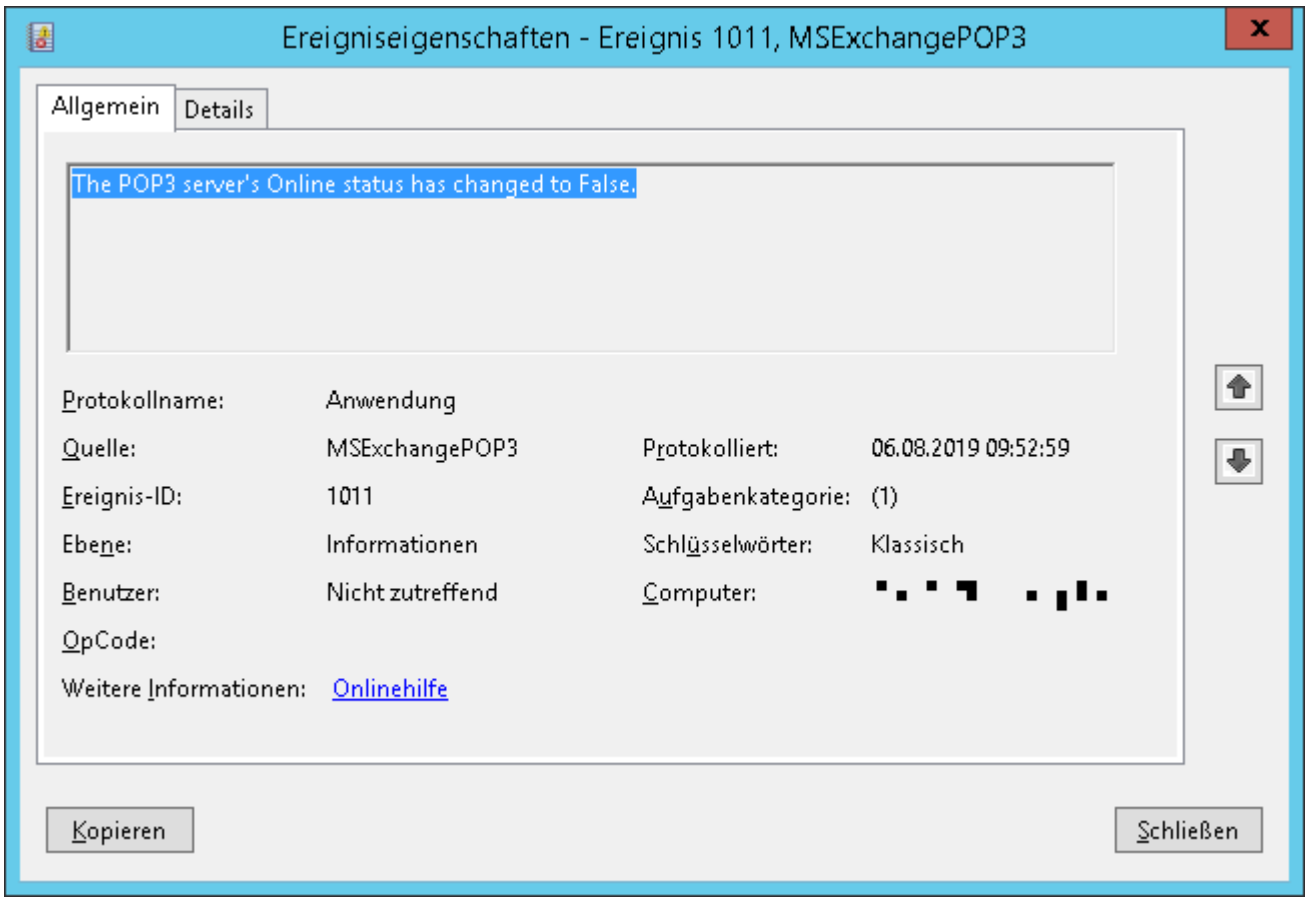

Bitte prüfen, ob der POP-Proxy des Exchange läuft (Exchange Management Shell):

```
Get-ServerComponentstate -Identity Exchange-Server
```

```
Server                                 Component
State
------                                 ---------
-----
Exchange-Server.mydomain.local                 ServerWideOffline
Active
Exchange-Server.mydomain.local                 HubTransport
Active
Exchange-Server.mydomain.local                 FrontendTransport
Active
Exchange-Server.mydomain.local                 Monitoring
Active
Exchange-Server.mydomain.local                 RecoveryActionsEnabled
Active
Exchange-Server.mydomain.local                 AutoDiscoverProxy
Active
Exchange-Server.mydomain.local                 ActiveSyncProxy
Active
Exchange-Server.mydomain.local                 EcpProxy
Active
Exchange-Server.mydomain.local                 EwsProxy
Active
Exchange-Server.mydomain.local                 ImapProxy
Active
Exchange-Server.mydomain.local                 OabProxy
Active
Exchange-Server.mydomain.local                 OwaProxy
Active
Exchange-Server.mydomain.local                 PopProxy
Inactive
Exchange-Server.mydomain.local                 PushNotificationsProxy
Active
Exchange-Server.mydomain.local                 RpsProxy
Active
Exchange-Server.mydomain.local                 RwsProxy
Active
Exchange-Server.mydomain.local                 RpcProxy
Active
Exchange-Server.mydomain.local                 UMCallRouter
Active
Exchange-Server.mydomain.local                 XropProxy
Active
Exchange-Server.mydomain.local                 HttpProxyAvailabilityGroup
Active
Exchange-Server.mydomain.local                 ForwardSyncDaemon
Inactive
Exchange-Server.mydomain.local                 ProvisioningRps
Inactive
Exchange-Server.mydomain.local                 MapiProxy
Active
Exchange-Server.mydomain.local                 EdgeTransport
```

```
Active
Exchange-Server.mydomain.local                  HighAvailability
Active
Exchange-Server.mydomain.local                  SharedCache
Active
```

Läuft der Proxy nicht, kann er mit Hilfe dieses Befehls wieder aktiviert werden:

```
Set-ServerComponentState -Identity Exchange-Server -Component PopProxy -
Requester HealthAPI -State Active
```

From:
https://wikinet.webby.hetzel-netz.de/ - **Sebastians IT-Wiki**

Permanent link:
https://wikinet.webby.hetzel-netz.de/exch:2013_pop3

Last update: **2019/08/06 10:45**